



Information Sheet No. TFD-2018-21

## FIRE RATED ACCESS PANELS

### General Description

Fire rated access panels that can be installed into most fire rated walls and ceilings where access to services is required.


### Applications

Fully certified to Australian Standards and available in fire resistance levels ranging from 1 hour to 4 hour, these panels can be designed to fit into walls, ceilings, floors and lift shafts. Meeting the requirements of most modern building design applications, they are a cost effective solution that is readily available and easy to install.


### Features

- Medium and hot temperature smoke seals, fire seals and acoustic seals available for some models
- 2 and 4 hour fire rated wall access panels suitable for masonry, concrete or plaster walls
- 1 hour fire rated plasterboard ceiling access panels can be flush or recess mounted
- Option of Ply, MDF or steel facing available on some models

Diagram of 4 hour fire rated wall access panel with different frame fitting options.

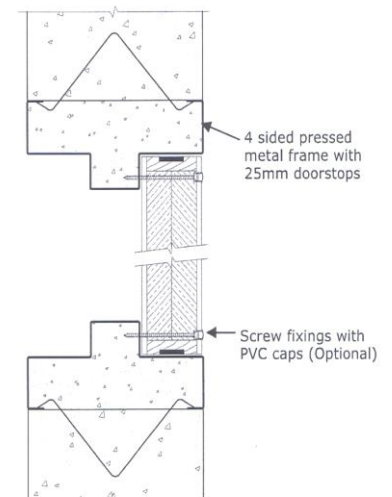

Wall panel with pressed metal door frame

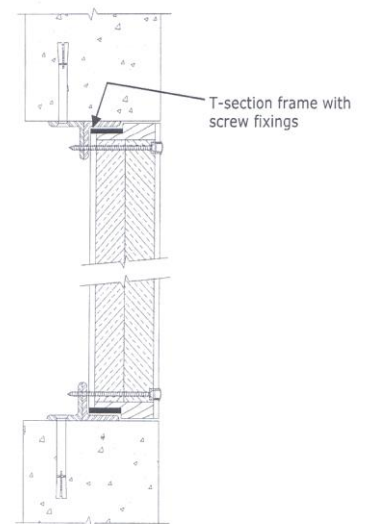

Wall panel with T-Section frame

For further information on fire rated access panels, please [contact Tasmanian Fire Doors](#)